



CHAIN SLING CONFIGURATION

Max-Alloy GR8 chain complies fully with SABS ISO 7593 for "Instant" assembled chain slings and to SABS ISO 4778 for "Welded" chain sling assemblies, and with the requirements of EN 818 - 1 & 4.


SINGLE CHAIN SLINGS

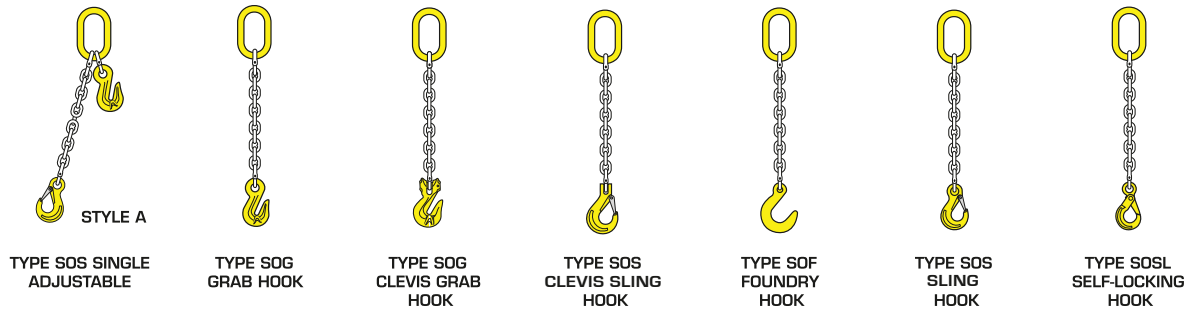


DOUBLE CHAIN SLINGS

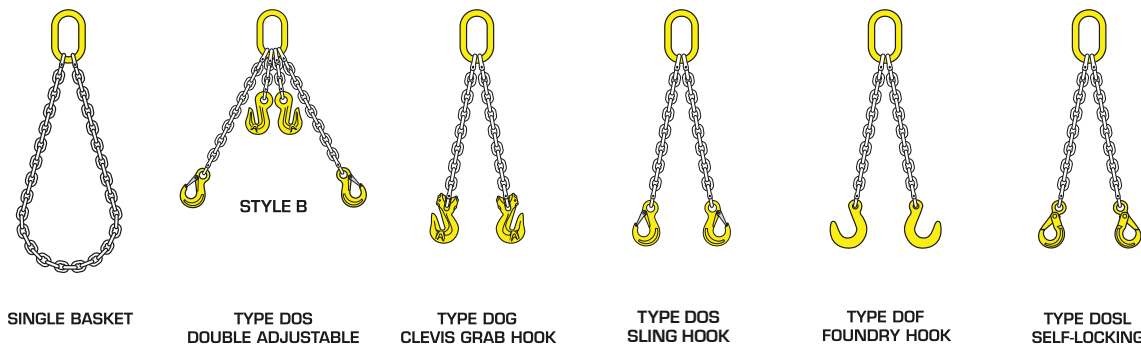

TRIPLE AND QUAD CHAIN SLINGS

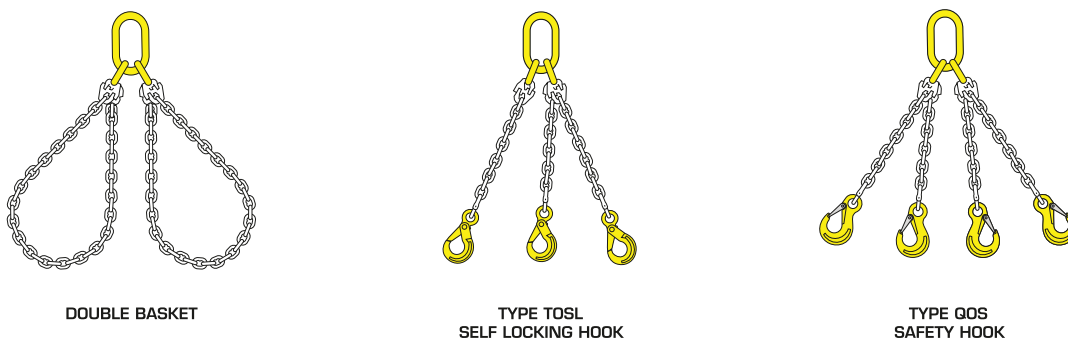


SINGLE ADJUSTABLE LOOP CHAIN SLING

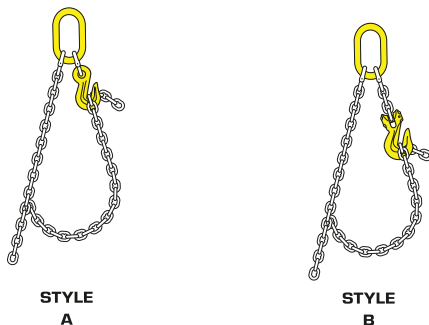

SINGLE ADJUSTABLE LOOP

DOUBLE ADJUSTABLE LOOP CHAIN SLING

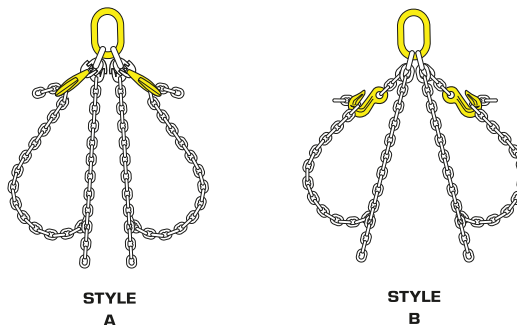

DOUBLE ADJUSTABLE LOOPS